


ACRYLEX

Acrylic Exterior Paint

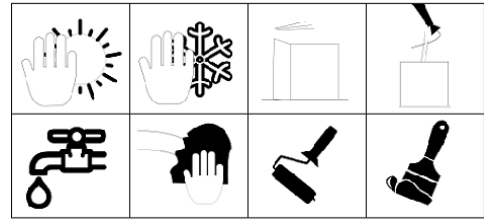

Description

Acrylic emulsion based topcoat for exterior surfaces with matt appearance and excellent hiding power. Paint can be produced with grained texture or without grain.

Application Areas

Applied successfully on exterior surfaces of all kinds of construction elements for decorative and protection purposes;

- Plastered surfaces
- Concrete
- Ytong, brick and eternit walls
- Old painted surfaces

Feature and Benefits

- Wide range of colors and applications.
- It has high resistance against weathering conditions, sunlight and water. It has excellent color retention and adhesion. It prevents the surface against to formation flake and blister.
- Time and labor saving due to application easiness.
- Water based, human and environment friendly. High water vapor permeability, allowing building to breathe. Prevent the surface against fungi and bacteria.

Technical Information

Content	Acrylic emulsion
Color	Most colors
Appearance	Viscous liquid
Water Vapor Permeability	Class V1 (TS 7847)
Water Transmission	Class W2 (TS 7847)
Particle Size	Class S1 (TS 7847)
Crack-bridging	Class A0
Carbon dioxide permeability	Class C0
Weight Solid	66±2%
Thinning	Water
Consumption	0,200 – 0,250 L / m ²

ACRYLEX

Acrylic Exterior Paint

Recommended Coat	2 coats
Application Tools	Brush / Roller / Spray Gun
Drying Time	2 hours to touch 12 hours to recoat 24 hours to full cure

Preparation of substrate

Dirt, grease, old loose or flaking materials must be removed from the surfaces. Old painted, weak and chalky surfaces to be cleaned. **PRIME-EX** Exterior Primer applied as a single layer either with brush or roller to ensure better adhesion and equal penetration of the paint into the surface. Cracks etc. to be repaired with **EXPAST** Acrylic Exterior Paste.

Application

After the surface preparation, acrylic paint is diluted with 20 % water and can be applied 2 coats with brush, roller and spray. Wait minimum 12 hours between the coats.

Packaging

15 L / 7,5 L / 2,5 L plastic bucket

Shelf Life

12 months in original, unopened package

Storage

Store in dry area between +5°C and +35°C. Protect from heat, freezing and direct sunlight.

Cleanup Information

Clean tools and equipment with water immediately after use. Dried material can only be removed mechanically.

ACRYLEX

Acrylic Exterior Paint

Cautions / Limitations

- Do not overcoat with solvent based materials.
- Do not apply in freezing conditions or during precipitation.
- Protect applied materials from rain, freezing, foot traffic and continuous high humidity until completely dry.
- Do not use when air and surface temperatures are below 0°C and above +35°C.
- Avoid heavy traffic for 24 hours.
- Allow 4 weeks before washing or cleaning for full cure.

Health and Safety

Warning! Cause eye and skin irritation. If eye contact, flush eyes with water for several minutes and remove contacts if present and easy to do. Get immediate medical attention. If skin contact; wash skin with plenty of soap and water. Get immediate medical attention. If swallowed, do not induce vomiting. Call a physician or poison control center. Never give anything by mouth to an unconscious person.

Wash hands thoroughly after handling. Wear protective clothing, gloves, eye and face protection. Do not eat, drink or smoke when using this product. Take off contaminated clothing and wash it before reuse. Dispose of unused, contents, container and other contaminated wastes in accordance with local, state, federal and provincial regulations.

Keep container closed when not in use. Keep out of the reach of children.

Limited Warranty: This product is subject to a written limited warranty which can be obtained free of charge from BAUMERK Company. Please contact with technical service department for further information and support.