


# CEILING PAINT

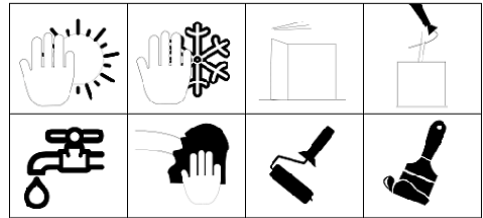

## Description

Acrylic emulsion based, matt, white color with superior hiding power interior ceiling paint.

## Application Areas

- Interior surface
- Wall and ceiling
- Old painted surface
- Plaster, concrete and lime surfaces.

## Feature and Benefits

- High water vapor permeability, allowing building to breathe.
- Gives matt and smooth appearance to the surfaces.
- Gives superior hiding power.
- Ensures perfect integration with the substrate without cracking, blistering and flacking.
- Time and labor saving due to have high leveling power during application.

## Technical Information

Content	Acrylic emulsion
Color	Most colors
Appearance	Viscous liquid
VOC Content	75 g/L
Gloss	Class G4
Particle Size	Class S1
Weight Solid	70±2%
Thinning	Water
Consumption	0,200 – 0,250 kg / m <sup>2</sup> for two layers
Recommended Coat	2 coats
Application Tools	Roller / Brush
Drying Time	2 hours to touch 8 hours to full cure

# CEILING PAINT

## Preparation of substrate

The substrate should be clean, dry, smooth and sound. Dust, dirt and grease on the surface should be cleaned. Old painted surface should be sanded. Surface cracks should be filled with **INPAST** Acrylic Interior Paste.

## Application

**Ceiling Paint** is diluted with water in the rate of 20% for first coat and 15% for second coat application. Paint is applied on the surface in two layers with a roller or brush.

## Packaging

20 kg / 17,5 kg / 10 kg / 3 kg plastic bucket

## Shelf Life

24 months in original, unopened package

## Storage

Store in dry area between +5°C and +35°C. Protect from heat, freezing and direct sunlight.

## Cleanup Information

Clean tools and equipment with water immediately after use. Dried material can only be removed mechanically.

## Cautions / Limitations

- Stir thoroughly before using the paint and do not mix it with a paint of another trade-mark.
- Do not apply in freezing conditions or during precipitation.
- Protect applied materials from rain, freezing, foot traffic and continuous high humidity until completely dry.
- Do not use when air and surface temperatures are below +0°C and above +35°C.
- Avoid heavy traffic for 24 hours.
- Allow 4 weeks before washing or cleaning for full cure.

# CEILING PAINT

## Health and Safety

**Warning!** Cause eye and skin irritation. If eye contact, flush eyes with water for several minutes and remove contacts if present and easy to do. Get immediate medical attention. If skin contact; wash skin with plenty of soap and water. Get immediate medical attention. If swallowed, do not induce vomiting. Call a physician or poison control center. Never give anything by mouth to an unconscious person.

Wash hands thoroughly after handling. Wear protective clothing, gloves, eye and face protection. Do not eat, drink or smoke when using this product. Take off contaminated clothing and wash it before reuse. Dispose of unused, contents, container and other contaminated wastes in accordance with local, state, federal and provincial regulations.

Keep container closed when not in use. Keep out of the reach of children.

**Limited Warranty:** This product is subject to a written limited warranty which can be obtained free of charge from BAUMERK Company. Please contact with technical service department for further information and support.