


# INTERPLUS

## Interior Extra Plastic Paint

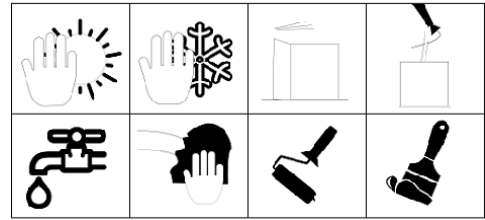

### Description

Acrylic-based, matt, deep white color and excellent hiding power interior topcoat.

### Application Areas

Used on interior of all buildings for the decorative purposes.

### Feature and Benefits

- Allows the substrates to breathe.
- Odorless.
- Washable.
- High hiding power and adhesion.

### Technical Information

Content	Acrylic emulsion
Color	Most colors
Appearance	Viscous liquid
VOC Content	72 g/L
Gloss	Class G4
Scrub Resistance	Class S2
Particle Size	Class S1
Weight Solid	68±2%
Thinning	Water
Consumption	0,140 – 0,160 L/ m <sup>2</sup> for two layers
Recommended Coat	2 coats
Application Tools	Roller / Brush
Drying Time	2 hours to touch 2 hours between coats 8 hours to full cure

### Preparation of substrate

# INTERPLUS

## Interior Extra Plastic Paint

The substrate should be clean, dry, smooth and sound. Substrates should be primed with **PRIME C 1/7** Concentrated Primer diluted in 1/7 (1 cup Concentrated Primer /7 cups water) and application of topcoat should be started at least 6 hours later.

### Application

**INTERPLUS** Interior Extra Plastic Paint should be mixed with 20% water until a homogenous state is achieved and then applied with brush or roller. **INTERPLUS** Interior Extra Plastic Paint should be applied to the entire substrate in 2 coats with lambskin roller, roller or brush and should be waited for at least 2 hours between coats.

### Packaging

15 L / 7,5 L / 2,5 L plastic bucket

### Shelf Life

24 months in original, unopened package

### Storage

Store in dry area between +5°C and +35°C. Protect from heat, freezing and direct sunlight.

### Cleanup Information

Clean tools and equipment with water immediately after use. Dried material can only be removed mechanically.

### Cautions / Limitations

- Stir thoroughly before using the paint and do not mix it with a paint of another trade-mark.
- Do not apply in freezing conditions or during precipitation.
- Protect applied materials from rain, freezing, foot traffic and continuous high humidity until completely dry.
- Do not use when air and surface temperatures are below 0°C and 35°C.
- Avoid heavy traffic for 24 hours.
- Allow 4 weeks before washing or cleaning for full cure.

# INTERPLUS

## Interior Extra Plastic Paint

### Health and Safety

**Warning!** Cause eye and skin irritation. If eye contact, flush eyes with water for several minutes and remove contacts if present and easy to do. Get immediate medical attention. If skin contact; wash skin with plenty of soap and water. Get immediate medical attention. If swallowed, do not induce vomiting. Call a physician or poison control center. Never give anything by mouth to an unconscious person.

Wash hands thoroughly after handling. Wear protective clothing, gloves, eye and face protection. Do not eat, drink or smoke when using this product. Take off contaminated clothing and wash it before reuse. Dispose of unused, contents, container and other contaminated wastes in accordance with local, state, federal and provincial regulations.

Keep container closed when not in use. Keep out of the reach of children.

**Limited Warranty:** This product is subject to a written limited warranty which can be obtained free of charge from BAUMERK Company. Please contact with technical service department for further information and support.