


INTERCO

Silicone Silk Matt

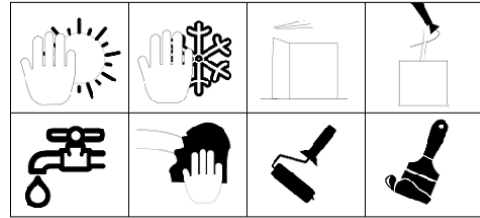

Description

Water based with silicone additives, cleanable, decorative silk matt interior topcoat.

Application Areas

Suitable for all types of interior surface of buildings.

Feature and Benefits

- High scrub and washable performance.
- Gives silk matt texture and smooth appearance to the surfaces.
- Gives breathability property to applied surfaces.
- Ensures perfect integration with the substrate without cracking, blistering and flacking.
- High color retention due to its qualified pigment structure, with deep white color and excellent covering capacity.
- Time and labor saving due to have high leveling power during application.
- Human and environment-friendly product with its odorless property.

Technical Information

Content	Acrylic emulsion
Color	Most colors
Appearance	Viscous liquid
VOC Content	<100 g/L
Scrub Resistance	Class S1
Gloss	Class G2
Particle Size	Class S1
Weight Solid	55±2%
Thinning	Water
Consumption	0,110 – 0,120 L / m ² for two layers
Recommended Coat	2 coats
Application Tools	Roller / Brush / Spray gun
Drying Time	2 hours to touch 8 hours to full cure

INTERCO

Silicone Silk Matt

Preparation of substrate

The surface should be dry and cleaned out of dirt, grease, old loose or flaking materials. The old paints must be sanded and removed. The surface of the wall must be smoothed with **INPAST** Acrylic Interior Paste and left to dry 24 hours.

Application

Dilute with 10 % water and apply in two coats. After surface preparation, **PRIME C 1/7** Concentrated Primer is diluted with water in the ratio of 1/7 (1 cup primer / 7 cups water) and applied as a single layer, left to dry for 24 hours. **INTERCO** Silicone Silk Matt is applied on the surface in two layers with a roller, brush or through spraying.

Packaging

15 L / 7,5 L / 2,5 L plastic bucket

Shelf Life

24 months in original, unopened package

Storage

Store in dry area between +5°C and +35°C. Protect from heat, freezing and direct sunlight.

Cleanup Information

Clean tools and equipment with water immediately after use. Dried material can only be removed mechanically.

Cautions / Limitations

- Stir thoroughly before using the paint and do not mix it with a paint of another trade-mark.
- Do not apply in freezing conditions or during precipitation.
- Protect applied materials from rain, freezing, foot traffic and continuous high humidity until completely dry.

INTERCO

Silicone Silk Matt

- Do not use when air and surface temperatures are below +0°C and above +35°C.
- Avoid heavy traffic for 24 hours.
- Allow 4 weeks before washing or cleaning for full cure.

Health and Safety

Warning! Cause eye and skin irritation. If eye contact, flush eyes with water for several minutes and remove contacts if present and easy to do. Get immediate medical attention. If skin contact; wash skin with plenty of soap and water. Get immediate medical attention. If swallowed, do not induce vomiting. Call a physician or poison control center. Never give anything by mouth to an unconscious person.

Wash hands thoroughly after handling. Wear protective clothing, gloves, eye and face protection. Do not eat, drink or smoke when using this product. Take off contaminated clothing and wash it before reuse. Dispose of unused, contents, container and other contaminated wastes in accordance with local, state, federal and provincial regulations.

Keep container closed when not in use. Keep out of the reach of children.

Limited Warranty: This product is subject to a written limited warranty which can be obtained free of charge from BAUMERK Company. Please contact with technical service department for further information and support.